

BIDIMENSIONALES

Bisagra eco 175° 48x6mm



Código: 0601-215

Acabado: Niquelado

Material: Acero

Distancia de perfocación K: 4

Unidad de medida: pieza



Profundidad de la cazoleta: 11,3

Angúlo de apertura: 175°


espesor de la puerta: 16 a 26

Diagrama de Producto:

Diagrama de instalación:

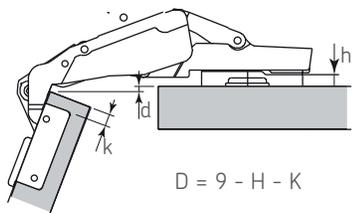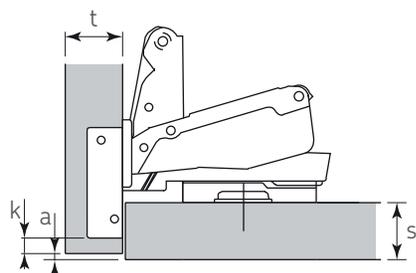

$$D = 9 - H - K$$

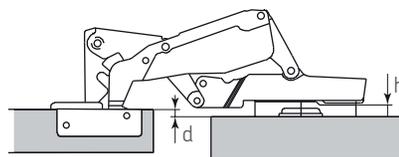



$$D = 1 + H + \text{altura del cuello}$$

| t= | 16 | 17 | 18 | 19 | 20 | 21 | 22 |
|--------|------|------|------|------|------|------|------|
| k=3 a= | 0,00 | 0,00 | 0,00 | 0,00 | 0,00 | 0,00 | 0,02 |
| k=4 a= | 0,00 | 0,00 | 0,00 | 0,00 | 0,00 | 0,05 | 0,27 |
| k=5 a= | 0,00 | 0,00 | 0,00 | 0,00 | 0,00 | 0,06 | 0,29 |
| k=6 a= | 0,00 | 0,00 | 0,00 | 0,00 | 0,00 | 0,06 | 0,39 |
| k=7 a= | 0,00 | 0,00 | 0,00 | 0,00 | 0,00 | 0,07 | 1,2 |

t Espesor de la puerta
a Fuga mínima
k Distancia de perfocación
s Espesor del lateral
h Altura de la base

Base recomendada

Código a
0601-290 Ø2,5


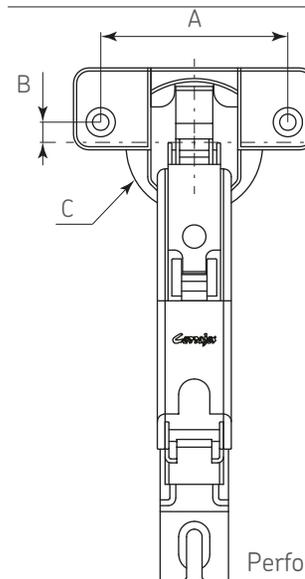


Dimensiones generales

| A | B | C | D |
|----|---|-----|------|
| 48 | 6 | Ø35 | 11,3 |

Perforación del gabinete

Perforación de la puerta

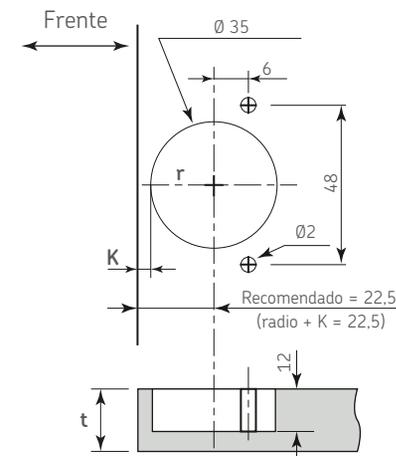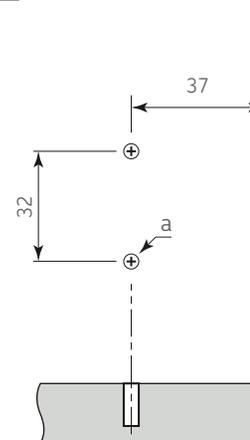


BIDIMENSIONALES

Bisagra eco 175° 48x6mm



Sistema de montaje:

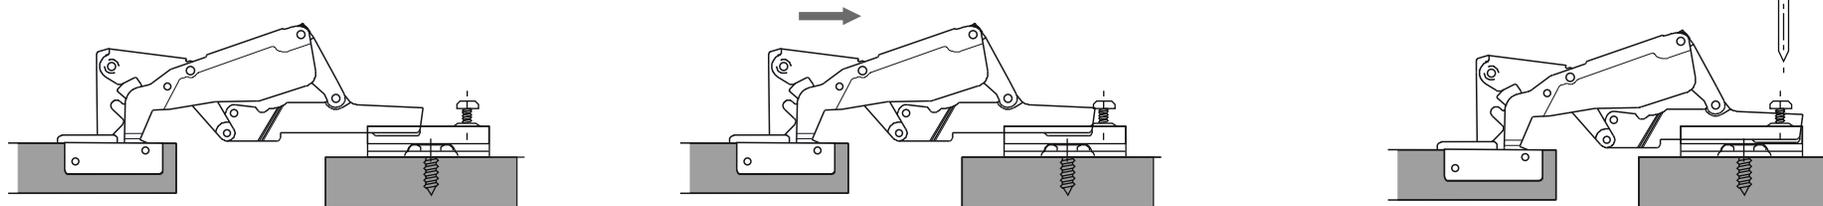

Ajuste:

